

INSTRUCTIONS FOR CONNECTION AND PROGRAMMING OF THE CONTROL PANEL *SMARTLINE 020-2 AND 036-4*




Diagram of connection of the instrumentation in the SMARTLINE control panel



Connecting smoke detectors to detection lines ZONE 1, ZONE 2, ZONE 3, ZONE 4

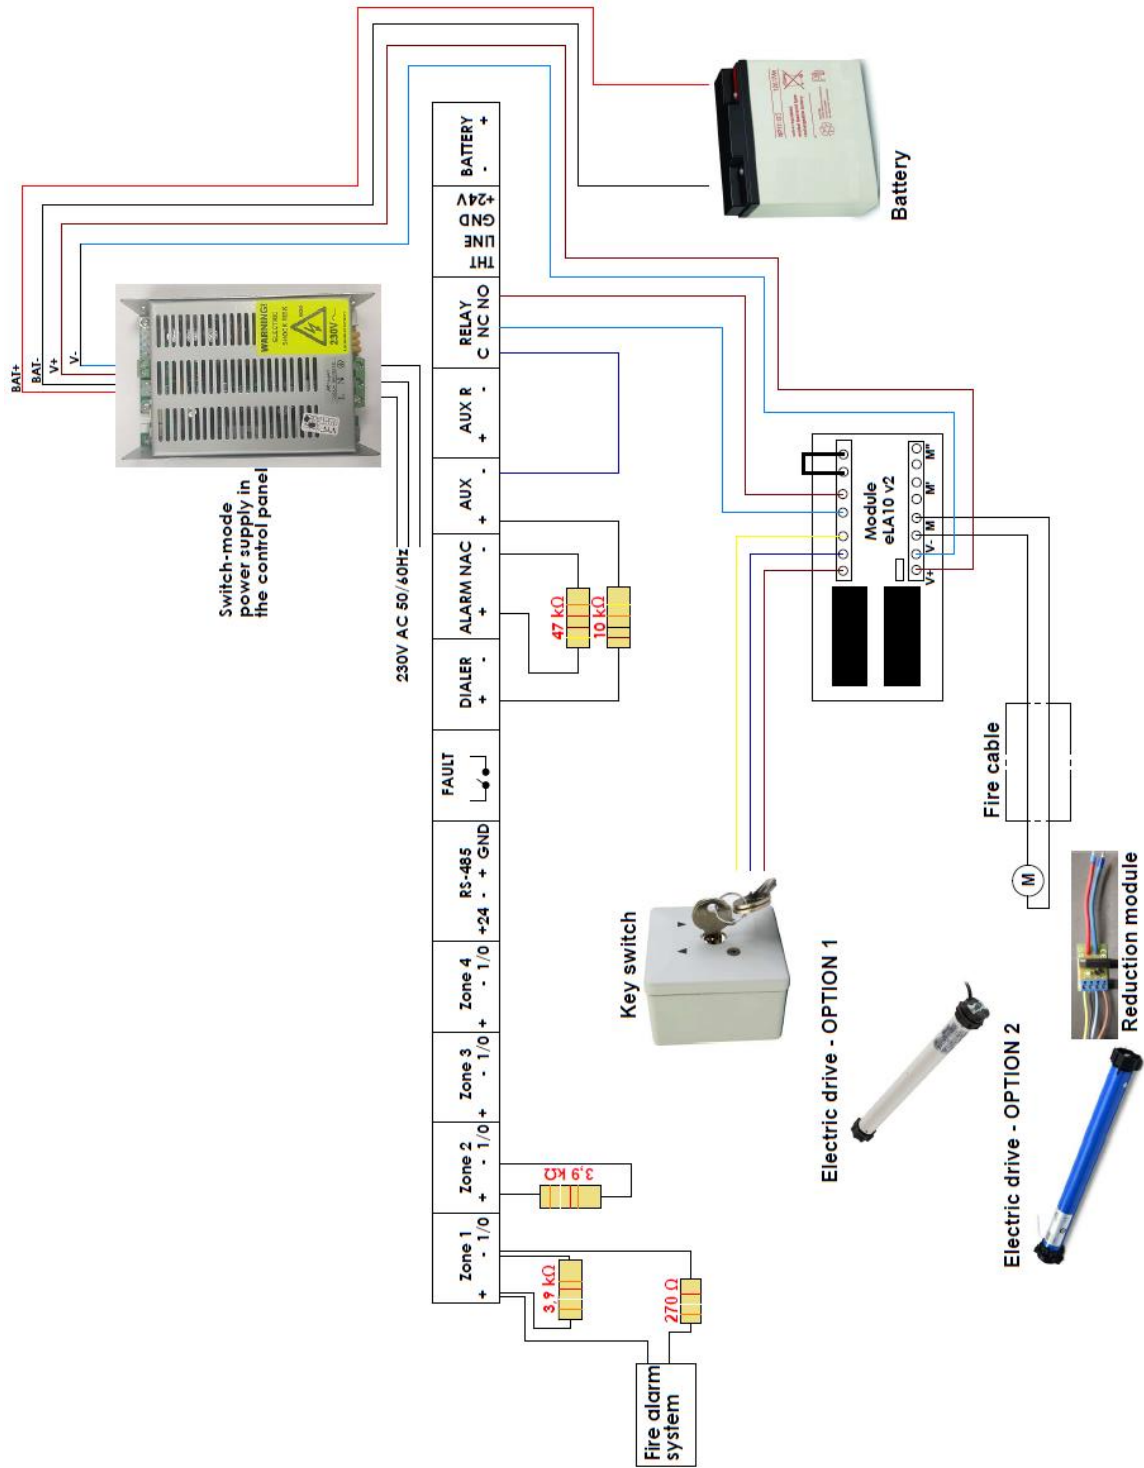


Connecting the alarm signalling output to the detection line ALARM NAC

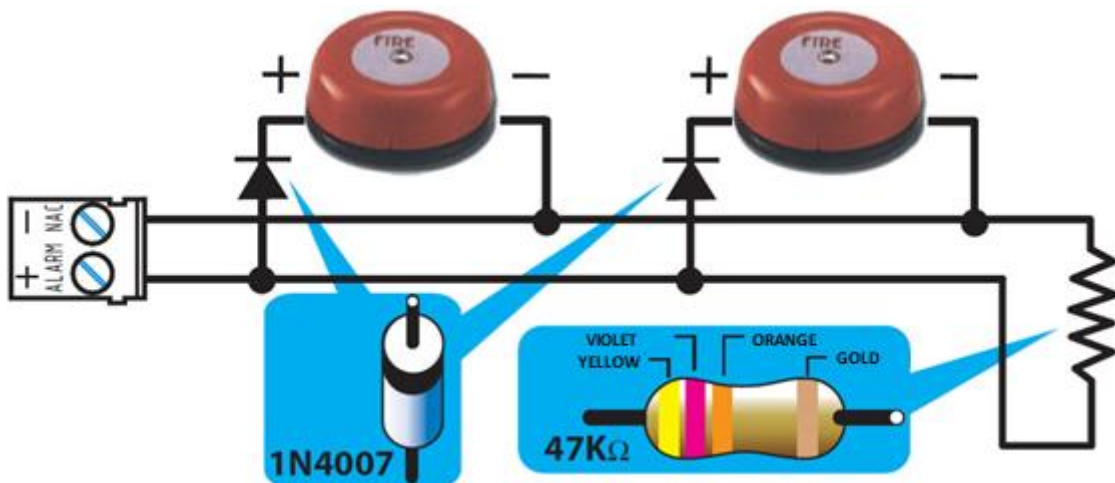

Control panel programming manual

In order to activate the "Programming" function in the control panel, put a dowel on the two lower pins

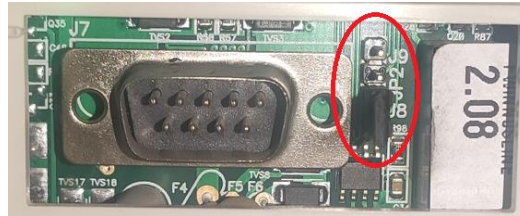

Use the "Up - Down" arrows to select the "Programming" line, confirm by pressing "OK"



Use "Up - Down" arrows to select the „Progr. zone” line, confirm by pressing "OK"



Use "Up - Down" arrows to select the „01 <Zona 01” line, confirm by pressing "OK"



Use "Up - Down" arrows to select the „Detektion line, confirm by pressing "OK"



Use "Up - Down" arrows to select the „Short=Alarm.” line, with the button „OK” we change on „YES”



Press the "Esc" button to get to the line **02 <Zone 02**

Use "Up - Down" arrows to select the „02 <Zona 02” line, confirm by pressing "OK"



Use "Up - Down" arrows to select the „Detektion line, confirm by pressing "OK"



Use "Up - Down" arrows to select the „Short=Alarm.” line, with the button „OK” we change on „YES”



Use the "Esc" button to exit to the main menu level, change the position of the dowel to programming blocked, the control panel reset.



After reset "Panel working" is displayed on the control panel display



ATTENTION!

**Before closing test make sure that upper and bottom limit switch on the engine are set up correct !!!!!!!!
Otherwise you might destroy the curtain !!!!!!!!**

1. Check the operation of the gate / curtain, put the key to control panel and press the "Evacuate" button on the control panel. If the gate / curtain closes, the test is successful.

Turn the key to the right to "LEVEL.2" and next push the "Silence " button on control panel, gate/curtain will stop.



Push the "Reset" button and SMARTLINE control panel will restart.



Then use **Key switch** to open the gate/curtain.



2. If the gate/curtain does not close, reverse motor polarity.

But first put the key to control panel and press the "Evacuate" button on the control panel.

Turn the key to the right to "LEVEL.2" and next push the "Silence " button on control panel - door will stop.



Push the "Reset" button and SMARTLINE control panel will restart.



Change the motor polarity and make once again test from the first step.

Programming complete.

3. Remove the key form SMARTLINE control panel

